

CLEANING INSTRUCTION FOR EXPANDED BEAM PERFORMANCE


CLEANING SET ORDER NO. 50535503

consists of

- 1 pc. Compressed air
- 1 pc. Cleaning instruction

INSTRUCTION

CLEANING MUST BE DONE AFTER EVERY
5,000 MATING CYCLES.

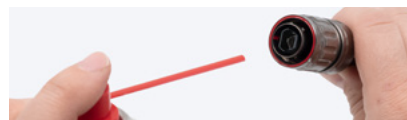

Blow out the ferrule at the open interface
(plug and receptacle).



Just in case

**Cleaning instructions
Gross contamination**

IMPORTANT NOTES

Always clean both sides of the connector and if disconnected also clean the standard fiber optic connectors on the other side of the connection system (with a standard ferrule cleaning procedure).

Please note that any contamination of our connectors should be avoided. Our cleaning instruction relates to the cleaning of our connectors after 5,000 mating cycles. However, in the event that the connectors have been contaminated with e.g. dust or mud, you may clean the connector as described in our cleaning instructions. ODU does not warrant any success regarding the result of the cleaning procedure and does not accept any liability for damages to the connectors cleaned in accordance with our cleaning instructions.

CLEANING INSTRUCTION FIBER OPTIC CBP / IT / 0923 / EN

